

Accessories



Perfect reception with the right antenna

We offer our customers a range of mobile radio and Wi-Fi antennas for professional use. When selecting the right antenna, the reception conditions and the installation options on site should be taken into account.

In the event of unfavourable reception conditions, such as when the device is located inside a shielded building or in a control cabinet, the use of external antennas is recommended. The brackets supplied for various mounting options are particularly practical. Of course, we also offer extension cables for our antennas if required.

Antennas with a magnetic base or a bracket are mainly used for devices that are already installed in an environment with relatively good reception.



Tested by us

Best wireless performance with INSYS products



Flexibility

Many different antenna designs depending on requirements and mounting options



Industrial-standard performance

Wide operating temperature range and reliable quality



External use

IP protection against entry of water or dust



Wide frequency ranges

Mobile radio antennas with worldwide frequency bands, in part already for 5G



High-quality cable material

Low signal attenuation with connection and extension cables


Technical data

Mobile radio antennas



Designation	Magnetic Antenna 4G/3G/2G SMA	Outdoor Wall Antenna 4G/3G/2G SMA	Allround Antenna 5G/4G/3G/2G SMA
Highlights	<ul style="list-style-type: none"> ■ Compact and easy mounting ■ Internal and external use 	<ul style="list-style-type: none"> ■ Robust mounting ■ Excellent performance ■ Internal and external use 	<ul style="list-style-type: none"> ■ Premium antenna ■ Excellent performance ■ Screw or wall mounting ■ Internal and external use ■ 5G ready
Frequency ranges	698 ... 960 MHz 1710 ... 2170 MHz 2500...2700 MHz (incl.US frequency bands)	699...960 MHz 1710 ... 2690 MHz (incl.US frequency bands)	617 ... 960 MHz 1710 ... 6000 MHz (incl. 5G bands FR1 and US bands)
Gain max.	1.0 dBi (698 ... 960 MHz) 2.4 dBi (1710 ...2170 MHz) 2.1 dBi (2500 ... 2700 MHz)	3.4 dBi (698 ... 960 MHz) 2.5 dBi (1710 ...2170 MHz) 1.0 dBi (2500 ... 2700 MHz)	2 dBi (617-960 MHz) 3.5 dBi (1710 ... 2700 MHz) 5 dBi (3400 ... 3800 MHz) 7 dBi (4900 ... 6000 MHz)
Mounting	Adhesive mounting with integrated magnet, antenna requires a conductive ferromagnetic surface, e.g. steel	Wall mounting incl. bracket	Screw mounting (M12 incl. sealing pad, antenna requires a metallic surface) or wall mounting incl. bracket
Dimensions	Height 72 mm, diameter 31 mm	Height 220 mm (325 mm incl. mounting bracket), wall clearance 155 mm	Height 82 mm (164 mm incl. mounting bracket), diameter 48 mm
Operating temperature	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
Protection class	IP65	IP65	IP66
Connecting cable	3 m, Type LMR100, SMA connection (m)	5 m, Type LL195, SMA connection (m)	5 m, Type CS29, SMA connection (m)
Article No.	10019504	10020596	10022961

Technical data

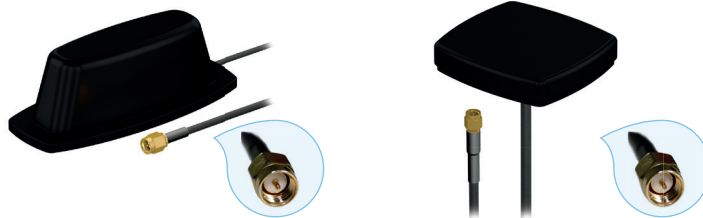

Designation	Magnetic/screw/adhesive Antenna	Roof Mount Antenna
	4G/3G/2G SMA	4G/3G/2G SMA
Highlights	<ul style="list-style-type: none"> ■ Versatile mounting options ■ Focus on European frequency bands 	<ul style="list-style-type: none"> ■ Compact design and stable mounting ■ Vandal-proof ■ Internal and external use
Frequency ranges	824 ... 960 MHz 1710 ... 2170 MHz (does not support 700 MHz bands)	698 ... 960 MHz 1710 ... 2170 MHz 2500 ... 2700 MHz (incl. US frequency bands)
Gain max.	2 dBi	1.8 dBi (698 ... 960 MHz) 3.5 dBi (1710 ...2170 MHz) 4.4 dBi (2500 ... 2700 MHz)
Mounting	Adhesive mounting (incl. magnet and adhesive pad), screws; antenna is surface independent (metal / other)	Screw/adhesive mounting (cable feed-through, incl. nut & adhesive pad); antenna is surface independent (metal / other)
Dimensions	Height 38 mm, length 117 mm, width 49,5 mm	Height 16 mm, length 80 mm, width 76 mm
Operating temperature	-40 ... +85 °C	-40 ... +85 °C
Protection class	-	IP67
Connecting cable	5 m, Type LMR100, SMA connection (m)	3 m, Type DACAR 302, SMA connection (m)
Article No.	10017462	10022309

Technical data

Mobile antennas with 2 connections (MIMO)



Designation	Magnetic Antenna MIMO 5G/4G/3G/2G SMA	Outdoor Panel Antenna MIMO 5G/4G/3G/2G SMA	Panel Antenna (EOL) 4G/3G/2G MIMO SMA
Highlights	<ul style="list-style-type: none"> ■ Premium antenna for routers with 2 antenna connections ■ Simple magnetic mounting ■ Internal and external use ■ 5G ready 	<ul style="list-style-type: none"> ■ Premium antenna for routers with 2 antenna connections ■ Excellent performance ■ Internal and external use ■ 5G ready 	<ul style="list-style-type: none"> ■ Premium antenna for routers with 2 antenna connections ■ Easy mounting on smooth surfaces ■ Internal and external use
Frequency ranges	698 ... 960 MHz, 1710 ... 3800 MHz (incl. 5G frequency bands FR1 and US frequency bands)	698 ... 960 MHz, 1710 ... 3800MHz (incl. 5G frequency bands FR1 and US frequency bands)	690-960 MHz 1710-2170 MHz 2500-2700 MHz (incl. US frequency bands)
Gain max.	1,5 dBi (668 ... 960 MHz) 4,5 dBi (1710 ... 2170 MHz) 5 dBi (2500 ... 3800 MHz)	2 dBi (668 ... 960 MHz) 5 dBi (1710 ... 2170 MHz) 4 dBi (2200 ... 3800 MHz)	2 dBi
Mounting	Adhesive mounting with integrated magnets, high adhesive force	Wall / pole mounting or for stand-up positioning (incl. 3 brackets with variable alignment), approx. 30 cm distance to metal surfaces	Mounting by means of mounted suction cups or with plastic screws; no direct mounting on metallic surfaces
Dimensions	45 x 150 x 61 mm (WxHxD)	155 x 155 x 75 mm (WxHxD)	184 x 84 x 8 mm (WxHxD) (depth 26 mm incl. suction cups)
Operating temperature	-30 ... +70 °C	-30 ... +80 °C	-40 ... +70 °C
Protection class	IP65	IP65	IP67
Connecting cable	2x 3 m, Type RG174, Connections: 2x SMA (m)	2x 5 m, Type CS29 (5 mm diameter), connections 2x SMA (m)	2x 2m, Type RG174, Connection 2x SMA (m)
Article No.	10022963	10022962	10020565

Technical data

LTE450 antennas



Designation	LTE450 Wall Antenna IP67 5m SMA	LTE450 Wall Antenna 5G/4G/3G/2G IP67 IK10 5m SMA	LTE450 Screw Mount Antenna 5G/4G/3G/2G IP67 IK10 5m SMA
Highlights	<ul style="list-style-type: none"> ■ Specially for LTE450 ■ Stable mounting ■ Indoor & outdoor use 	<ul style="list-style-type: none"> ■ High-performance antenna ■ Combination LTE450 and mobile radio frequencies incl. 5G ■ Stable mounting ■ Indoor & outdoor use ■ Vandalism protection IK10 	<ul style="list-style-type: none"> ■ Compact high-performance antenna ■ Combination LTE450 and mobile radio frequencies incl. 5G ■ Stable mounting ■ Indoor & outdoor use ■ Vandalism protection IK10
Frequency ranges	410 ... 496 MHz	410 ... 470 MHz 600 ... 960 MHz 1700 ... 3800 MHz	450 ... 470 MHz 700 ... 960 MHz 1700 ... 4000 MHz
Gain max.	1,5 dBi	2,3 dBi (410 ... 470 MHz) 5,0 dBi (650 ... 960 MHz) 7,0 dBi (1700 ... 3800 MHz)	4,0 dBi (450 ... 470 MHz) 4,5 dBi (700 ... 960 MHz) 7,5 dBi (1700 ... 4000 MHz)
Mounting	Wall mounting with steel angle	Wall mounting incl. steel angle or pole mounting incl. pipe clamp or screw mounting on metallic surface	Screw mounting on metallic surfaces, mounting hole 20 mm incl. nut M18
Dimensions	Height 220 mm (325 mm incl. mounting bracket), diameter 70mm, wall clearance 155 mm	Height 255 mm (350 mm incl. mounting bracket), wall clearance 82 mm	Height 50 mm (75 mm incl. mounting bracket), width 148 mm, length 165 mm
Operating temperature	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
Protection class	IP67	IP67 (environment), IK10 (vandalism)	IP67 (environment), IK10 (vandalism)
Connecting cable	5 m, type LL195, connection SMA (m)	5 m type LMR-195, connection SMA (m)	5 m type LMR-195, connection SMA (m)
Article No.	10024225	10024263	10024278

Technical data

Antenna extension cable



Designation	Antenna Extension Cable 5 m SMA	Antenna Extension Cable 10 m SMA	Antenna Extension Cable 15 m SMA
Highlights	<ul style="list-style-type: none"> ■ Useful in unfavourable installation locations ■ Low signal attenuation 		
Frequency range	5 - 6000 MHz		
Dimensions	Diameter 5.4 mm, for length see article designation		
Operating temperature	-20 ... +75 °C		
Cable material	Type H-155		
Article No.	Length 5 m: 10015193	Length 10 m: 10018607	Length 15 m: 10000735

Technical data

Wi-Fi antennas



Designation	Magnetic Antenna WiFi 2.4 GHz rev. SMA	Outdoor Wall Antenna Wi-Fi rev. SMA	Antenna with hinge Wi-Fi 2.4 GHz rev. SMA
Highlights	<ul style="list-style-type: none"> ■ Compact and easy mounting ■ Internal and external use 	<ul style="list-style-type: none"> ■ Robust mounting ■ Internal and external use 	<ul style="list-style-type: none"> ■ Compact and easy mounting
Frequency ranges	2410 ... 2490 MHz	2410 ... 2490 MHz, 4920 ... 5925 MHz	2400 ... 2484 MHz
Gain max.	1.6 dBi	1.5 dBi (2.4 GHz), 1.7 dBi (5 GHz)	3 dBi
Mounting	Adhesive mounting with integrated magnet, antenna requires a conductive ferromagnetic surface, e.g. steel	Wall mounting incl. bracket	Mounting on antenna connector, articulated joint 0 ... 90°, no installation in metallic control cabinets
Dimensions	Height 72 mm, diameter 31 mm	Height: 27 cm (incl. mounting bracket), Wall clearance: 115 mm	Length 137 mm, Diameter 13 mm
Operating temperature	-40 ... +85 °C	-40 ... +85 °C	-30 ... +60 °C
Protection class	IP67	IP54	-
Connecting cable	1.5 m, Type LMR100, rev. SMA (m)	2.5m, Type LMR100, rev. SMA (m)	Plug rev. SMA (m), no cable
Article No.	10019797	10022599	10000661